



深圳市亿智顺科技有限公司

电话: 0755-36960879
手机: 13751150321
邮箱: info@yzshun.com
官网: www.yzshun.com
官网: www.wisdomshun.com
地址: 深圳市龙岗区平湖华南城5号包装物流区1D090

扫一扫进入官网



深圳市亿智顺科技有限公司

只因专注，所以专业。



深圳市亿智顺科技有限公司位于中国广东省深圳市，主要从事智能照明灯具生产与销售一体化服务，等照明产品的研发、制造和销售的业内知名制造企业，LED照明灯具，LED面板灯，LED筒灯，LED射灯，LED天花灯主要适用于智能家居照明，室内照明，商业照明，酒店照明，主要市场于全国及欧洲市场，公司本着‘客户至上，质量为本’的原则，携手共赢！官网：www.yzshun.com, www.wisdomshun.com, 电话：0755-36960879 邮箱：info@yzshun.com




LED灯具制造商
只因专注，所以专业。

产品目录

LED筒灯.....	01-02
LED射灯.....	03-06
LED灯带.....	07-08
LED球泡灯.....	09-10
LED面板灯.....	11-12
LED灯管.....	13-14
LED电源.....	15-16


更节能 * 更安全 * 更智能 * 更放心 * 更耐用

YZS-DW-COB-7W

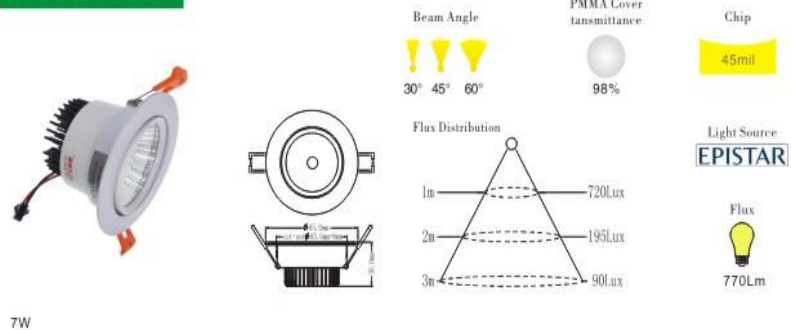


7W

YZS-DW-SMD-3W

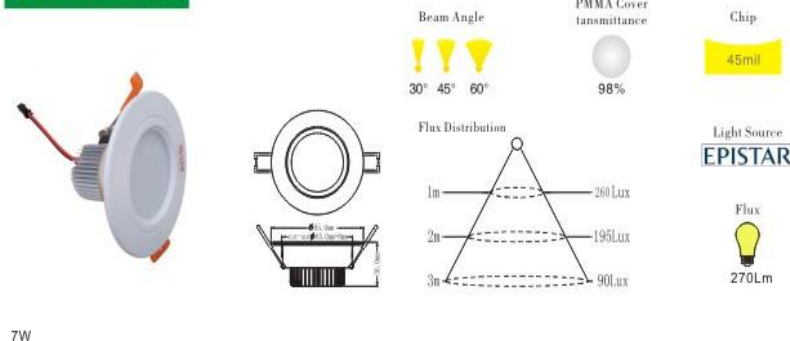


7W

YZS-GG-COB-7W

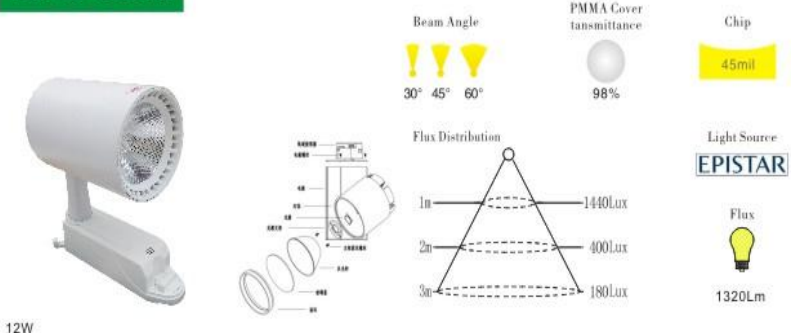

12W

YZS-DW-SH-3W

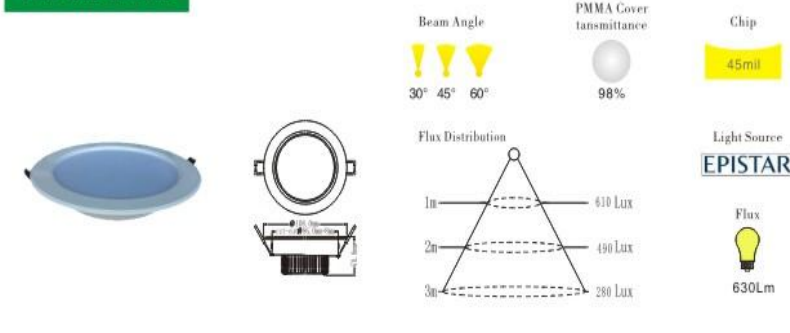

Model No	Power	Voltage	CCT	Flux	Dimension	LED	Beam Angle	Life Span
YZS-DW-COB-7W	7W	AC85V-260V	2700-7500K	770Lm	Φ110*80mm	COB	24°	≥30,000hrs
YZS-DW-COB-12W	12W	AC85V-260V	2700-7500K	1320Lm	Φ110*100mm	COB	24°	≥30,000hrs
YZS-GG-COB-7W	7W	AC85V-260V	2700-7500K	770Lm	Φ120*75mm	COB	24°	≥30,000hrs
YZS-GG-COB-12W	12W	AC85V-260V	2700-7500K	1320Lm	Φ120*75mm	COB	24°	≥30,000hrs




Model No	Power	Voltage	CCT	Flux	Dimension	LED	Beam Angle	Life Span
YZS-DW-SMD-3W	3W	AC85V-260V	2700-7500K	270Lm	Φ100*45mm	2835	120°	≥30,000hrs
YZS-DW-SMD-7W	7W	AC85V-260V	2700-7500K	630Lm	Φ120*60mm	2835	120°	≥30,000hrs
YZS-GG-SH-3W	3W	AC85V-260V	2700-7500K	270Lm	Φ95*30mm	2835	120°	≥30,000hrs
YZS-GG-SH-7W	7W	AC85V-260V	2700-7500K	630Lm	Φ120*30mm	2835	120°	≥30,000hrs

YZS-DW-SD-3W



3W




Beam Angle
30° 45° 60°

PMMA Cover
transmittance
98%

Chip
45mil

Flux Distribution



Light Source
EPISTAR

Flux
300Lm

YZS-DW-SD-6W



6W




Beam Angle
30° 45° 60°

PMMA Cover
transmittance
98%

Chip
45mil

Flux Distribution



Light Source
EPISTAR

Flux
600Lm




Model No	Power	Voltage	LED	CCT	Flux	Dimension	Beam Angle	Life Span
YZS-DW-SD-3W	3W	AC85V~260V	5050	2700~7500K	300Lm	Φ85x25mm	12°	≥30,000hrs
YZS-DW-SD-6W	6W	AC85V~260V	5050	2700~7500K	600Lm	Φ110x45mm	12°	≥30,000hrs
YZS-DW-SD-9W	9W	AC85V~260V	5050	2700~7500K	900Lm	Φ140x45mm	12°	≥30,000hrs
YZS-DW-SD-12W	12W	AC85V~260V	5050	2700~7500K	1200Lm	Φ140x45mm	12°	≥30,000hrs



应用场景 Case scenario







Model No	CCT	Power	Voltage	Light Source	Package	Flux	Beam Angle	Life Span
YZS-ST-AC5730	2700-7500K	6w/m	AC 220V	SMD3014/5730	100meter	70Lm/w	160°	≥30,000hrs
YZS-ST-AC2835	2700-7500K	8w/m	AC 220V	2835	100meter	70Lm/w	160°	≥30,000hrs
YZS-ST-AC5050	2700-7500K	10w/m	AC 220V	5050	100meter	70Lm/w	160°	≥30,000hrs
YZS-ST-ACRGB	RGB	8w/m	AC 220V	5050	100meter	70Lm/w	160°	≥30,000hrs



1米1米, 请在一米内使用



请连接好口平剪



LED接口为立插, 不用插到插孔



220V电压, 请注意安全



1米一个固定卡扣



Model No	CCT	Power	Voltage	Light Source	Package	Flux	Beam Angle	Life Span
YZS-ST-SO5730	2700-7500K	6w/m	AC 220V	SMD3014/5730	100meter	70Lm/w	160°	≥30,000hrs
YZS-ST-SO2835	2700-7500K	8w/m	AC 220V	2835	100meter	70Lm/w	160°	≥30,000hrs
YZS-ST-SO5050	2700-7500K	10w/m	AC 220V	5050	100meter	70Lm/w	160°	≥30,000hrs
YZS-ST-SORGB	RGB	8w/m	AC 220V	5050	100meter	70Lm/w	160°	≥30,000hrs



8管耗通



72W驱动器



AC220V

Model No	CCT	Power	Voltage	Light Source	Package	Flux	Beam Angle	Life Span
YZS-ST-DC-IP20	2700-7500K	5w/m	AC 220V	SMD3014/5730	5meter	70Lm/w	160°	≥30,000hrs
YZS-ST-DC-IP65	2700-7500K	5w/m	AC 220V	2835	5meter	70Lm/w	160°	≥30,000hrs
YZS-ST-DC-RGB	RGB	5w/m	AC 220V	5050	5meter	70Lm/w	160°	≥30,000hrs
YZS-ST-DC-PK		5w/m	AC 220V		5meter	70Lm/w	160°	≥30,000hrs



应用场景 Case scenario





YZS-BU-A60



small size

9W

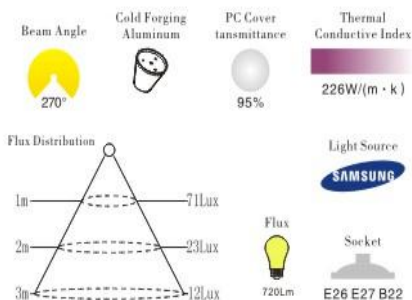


YZS-BU-H18



High Bulb

18W

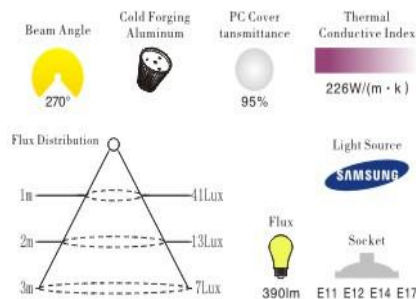


Model No	Power	Voltage	Light Source	CCT	Flux	Dimension	Socket	Beam Angle	Life Span
YZS-BU-A50	3-5W	Ac220v	SMD5630	2700-7500K	80Lm/w	50xH90mm	E26 E27 B22	180°	≥30,000hrs
YZS-BU-A60	7-9W	Ac220v	SMD5630	2700-7500K	80Lm/w	60xH105mm	E26 E27 B22	180°	≥30,000hrs
YZS-BU-A70	12-15W	Ac220v	SMD5630	2700-7500K	80Lm/w	70xH115mm	E26 E27 B22	180°	≥30,000hrs
YZS-BU-H80	18W	Ac220v	SMD5630	2700-7500K	80Lm/w	80xH135mm	E26 E27 B22	180°	≥30,000hrs
YZS-BU-H100	28W	Ac220v	SMD5630	2700-7500K	80Lm/w		E26 E27 B22	180°	≥30,000hrs
YZS-BU-H115	38W	Ac220v	SMD5630	2700-7500K	80Lm/w		E26 E27 B22	180°	≥30,000hrs
YZS-BU-H120	48W	Ac220v	SMD5630	2700-7500K	80Lm/w		E26 E27 B22	180°	≥30,000hrs

YZS-BU-GU10



mini size

COB 6W

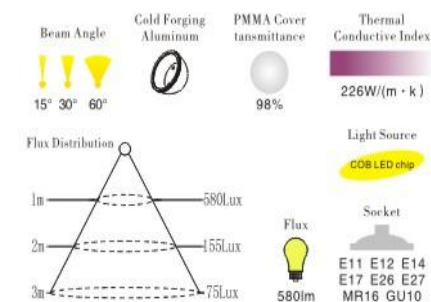




LED 面板灯&平板灯


适用于办公照明，写字楼照明，商业照明，厨卫间照明，酒店照明



Driver

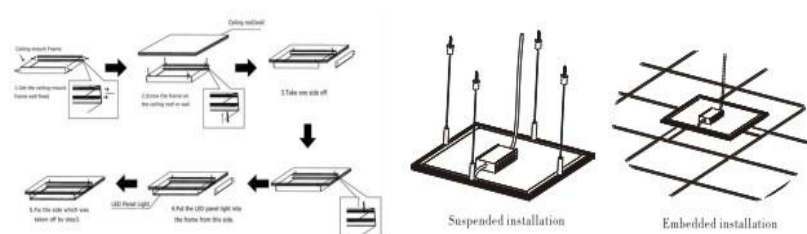

Model No	Dimension	Power	Voltage	Light Source	CCT	Flux	Beam Angle	Life Span
YZS-PN3030	L295xW295xH9mm	12w	AC220V	SMD2835	3000-6500K	1080Lm	120°	≥50,000hrs
YZS-PN6030	L595xW295xH9mm	24w	AC220V	SMD2835	3000-6500K	2160Lm	120°	≥50,000hrs
YZS-PN12030	L1195xW295xH9mm	36w	AC220V	SMD2835	3000-6500K	3240Lm	120°	≥50,000hrs
YZS-PN6060	L595xW595xH9mm	36w	AC220V	SMD2835	3000-6500K	3240Lm	120°	≥50,000hrs
YZS-PN12060	L1195xW595xH9mm	72w	AC220V	SMD2835	3000-6500K	6480Lm	120°	≥50,000hrs

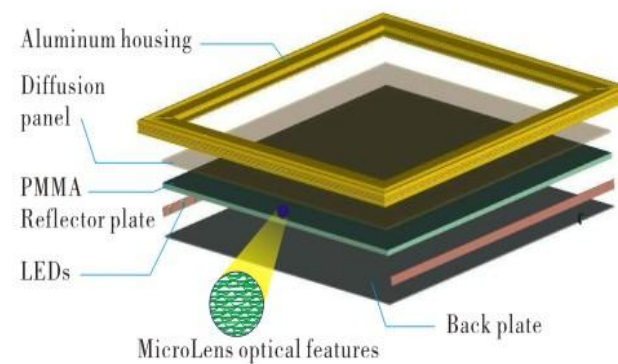



灯管安装步骤

1 LED单灯管接线示意图

PS: 先关掉电源再根据步骤安装; 电压必须为220V 常用电压

4. 安装LED灯管

1. 移开传统日光灯

2. 移开启辉器

3. 移开电子镇流器

2 LED一体化灯管接线示意图

L火线


N零线

220V/50HZ


安装的时候必须确保灯体安装稳固!

3 LED一体化灯管串联示意图


注意: 18W灯管串联不能超过3根, 9W不能超过5根, 由此造成的损毁, 本店概不负责



Model No	Dimension	Power	Voltage	Light Source	CCT	Flux	Beam Angle	Life Span
YZS-T806-U	L600xW31xH36mm	12W	AC85V~260V	SMD3014/5730	2700~7500K	920Lm	160°	≥30,000hrs
YZS-T809-U	L900xW31xH36mm	16W	AC85V~260V	SMD3014/5730	2700~7500K	1240Lm	160°	≥30,000hrs
YZS-T812-U	L1200xW31xH36mm	20W	AC85V~260V	SMD3014/5730	2700~7500K	1840Lm	160°	≥30,000hrs
YZS-T815-U	L1500xW31xH36mm	24W	AC85V~260V	SMD3014/5730	2700~7500K	2300Lm	160°	≥30,000hrs



Model No	Dimension	Power	Voltage	Light Source	CCT	Flux	Beam Angle	Life Span
YZS-T806-A	L588xW29xH33mm	12W	AC85V~260V	SMD3014/5730	2700~7500K	1070Lm	160°	≥30,000hrs
YZS-T809-A	L898xW29xH33mm	16W	AC85V~260V	SMD3014/5730	2700~7500K	1540Lm	160°	≥30,000hrs
YZS-T812-A	L1198xW29xH33mm	20W	AC85V~260V	SMD3014/5730	2700~7500K	2000Lm	160°	≥30,000hrs
YZS-T815-A	L1498xW29xH33mm	24W	AC85V~260V	SMD3014/5730	2700~7500K	2550Lm	160°	≥30,000hrs



Model No	Dimension	Power	Voltage	Light Source	CCT	Flux	Beam Angle	Life Span
YZS-T506-U	L560xW25x35mm	11W	AC85V~260V	SMD3014	2700~7500K	910Lm	160°	≥30,000hrs
YZS-T509-U	L860xW25x35mm	15W	AC85V~260V	SMD3014	2700~7500K	1420Lm	160°	≥30,000hrs
YZS-T512-U	L1160xW25x35mm	18W	AC85V~260V	SMD3014	2700~7500K	1820Lm	160°	≥30,000hrs
YZS-T515-U	L1460xW25x35mm	24W	AC85V~260V	SMD3014	2700~7500K	2500Lm	160°	≥30,000hrs



【产品特点 Feature】

- * 高PF, 高效率
- * 隔离驱动电源
- * 宽压AC85-265V
- * 采用安全可靠恒流模式
- * 开路、短路、过载、过压保护。
- * No strobe
- * Isolated drive power
- * input : AC85-265V
- * Adopt safe and reliable constant current mode
- * Open circuit, short circuit, overload, over voltage protection

Model No	Dimension	Power	Input	PFC	Output	Current	Shell	Life Span
YZS-DR-IP65-20W	115x40x30mm	20W	AC85V-260V	0.95	DC 24-45V	600mA	Al alloy	≥30,000hrs
YZS-DR-IP65-30W	115x40x30mm	30W	AC85V-260V	0.95	DC 24-45V	900mA	Al alloy	≥30,000hrs
YZS-DR-IP65-40W	115x40x30mm	40W	AC85V-260V	0.95	DC 24-45V	1200mA	Al alloy	≥30,000hrs
YZS-DR-IP65-50W	140x42x32mm	50W	AC85V-260V	0.95	DC 24-45V	1500mA	Al alloy	≥30,000hrs
YZS-DR-IP65-80W	180x61x38mm	80W	AC85V-260V	0.95	DC 24-45V	1500mA	Al alloy	≥30,000hrs
YZS-DR-IP65-100W	180x61x38mm	100W	AC85V-260V	0.95	DC 24-45V	1500mA	Al alloy	≥30,000hrs
YZS-DR-IP65-150W	210*68*39mm	150W	AC85V-260V	0.95	DC 24-45V	1500mA	Al alloy	≥30,000hrs



【产品特点 Feature】

- * 无频闪
- * 隔离驱动电源
- * 宽压AC85-265V
- * 采用安全可靠恒流模式
- * 开路、短路、过载、过压保护。
- * No strobe
- * Isolated drive power
- * input : AC85-265V
- * Adopt safe and reliable constant current mode
- * Open circuit, short circuit, overload, over voltage protection

Model No	Dimension	Power	Input	PFC	Output	Current	Shell	Life Span
YZS-DR-IP40-1/3W	80x32x23mm	3W	AC85V-260V	0.65	DC 9-12V	300mA	Plastic	≥30,000hrs
YZS-DR-IP40-5/8W	80x32x23mm	8W	AC85V-260V	0.65	DC 12-24V	300mA	Plastic	≥30,000hrs
YZS-DR-IP40-8/12W	80x32x23mm	12W	AC85V-260V	0.65	DC 24-45V	300mA	Plastic	≥30,000hrs
YZS-DR-IP40-18W	115x45x25mm	18W	AC85V-260V	0.65	DC 45-60V	300mA	Plastic	≥30,000hrs
YZS-DR-IP40-24W	115x45x25mm	24W	AC85V-260V	0.65	DC 60-75V	300mA	Plastic	≥30,000hrs
YZS-DR-IP40-36W	115x45x25mm	36W	AC85V-260V	0.65	DC 36-45V	950mA	Plastic	≥30,000hrs
YZS-DR-IP40-42W	115x45x25mm	40W	AC85V-260V	0.65	DC 36-45V	1250mA	Plastic	≥30,000hrs